


# Standard Configuration

HRK series grooving machine, compact structure, reliable performance, frame structure, non-deformation



Adopt Taiwan HUSTcontroller

Tool carrier can hold 3 tools at the same time, The maximum cutting depth is 1mm, which is 5 times of the efficiency of traditional equipment, and the return speed is also 5 times faster.

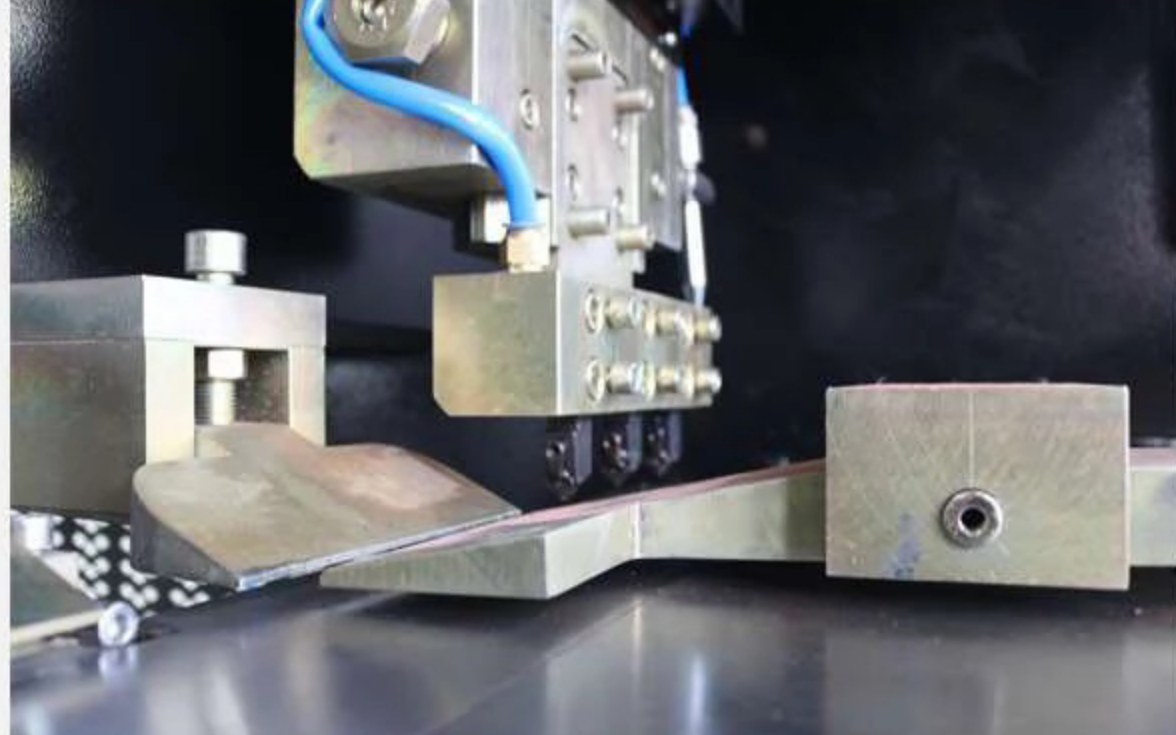

Pneumatic Feeding clamp

Pneumatic material clamping device

X, Y and Z axes are equipped with Japan PANASONIC servo motors




Taiwan HIWIN linear guide

Taiwan YYC gear-rack drive




Schneider electrics

Taiwan AIRTAC air valve

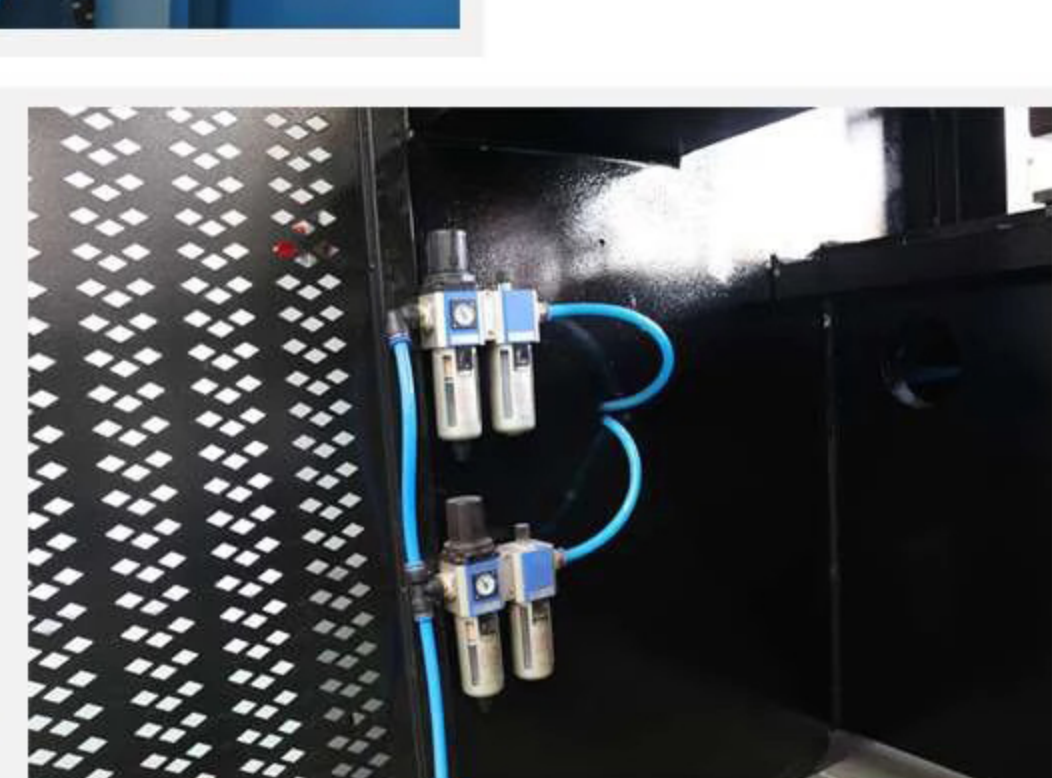

Taiwan AIRTAC cylinder

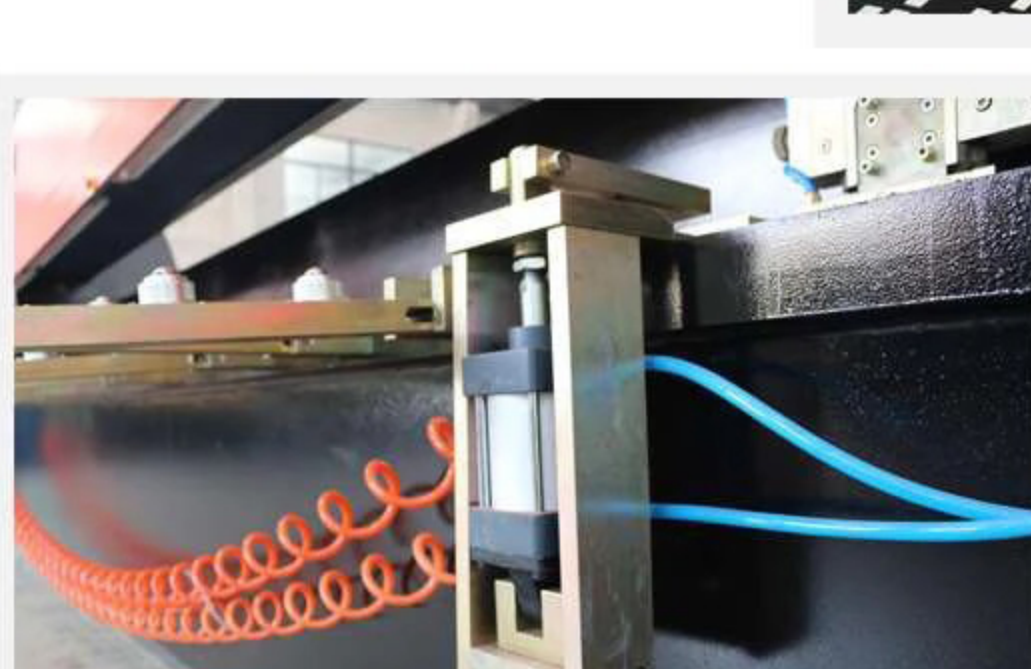

Front photoelectric safety protection

